

Rail Delivery Group



Timetable Information Data Feed Interface Specification

**Subject Ref: RSPS5046
Version: P-04-02**

Documentation Management

This documentation is published via the ASSIST website only.

The Version Control and Release Management of this documentation is managed by the Rail Delivery Group's Compliance Standards team.

Copyright

The copyright in this work is vested in Rail Settlement Plan Limited and the information contained herein is confidential. This work (either in whole or in part) must not be modified, reproduced, disclosed or disseminated to others or used for purposes other than that for which it is supplied, without the prior written permission of Rail Settlement Plan Limited. If this work or any part hereof is furnished to a third party by virtue of a contract with that party, use of this work by such party shall be governed by the express contractual terms between Rail Settlement Plan Limited which is a party to that contract and the said party. © 2025

Acknowledgements: Portions of this document are Copyright (c) 1999-2014 Fujitsu Services Ltd and are used by RSP with permission to sub-license to third parties only for the purpose of designing, developing and maintaining interfaces to the Data Transformation and Distribution Service.

Version History

| Version | Comments |
|---------|--|
| P-04-00 | <p>Removal of FTP option from DTD (new diagram in section 3.1)</p> <p>Several Minor updates required to RSPS5046.</p> <p>New section 5.3.6.4 added to clarify GMT/BST considerations.</p> <p>Add clarification to row 21 of the table in 5.5.2.1</p> <p>Encourage use of the DTD web portal rather than email</p> <p>Clarify in section 5.13.4 that not all data items relate to real stations</p> |

Contents

| | | |
|-----------|---|-----------|
| 1. | Acknowledgements | 6 |
| 2. | Scope | 6 |
| 3. | Approach | 7 |
| 4. | Data feeds | 8 |
| 5. | Key Technical Details | 10 |
| 5.1 | Structure..... | 10 |
| 5.2 | Contents file | 11 |
| 5.3 | Basic Timetable Detail File | 12 |
| 5.4 | Basic Timetable Detail File Format | 14 |
| 5.5 | Basic Timetable Detail Record Layouts | 16 |
| 5.6 | Example Basic Timetable Detail data | 25 |
| 5.7 | TTIS Rejects File..... | 26 |
| 5.8 | 'Z-trains' File..... | 27 |
| 5.9 | Common Interface File Set Details | 27 |
| 5.10 | Fixed Links File | 28 |
| 5.11 | Additional Fixed Links File | 30 |
| 5.12 | TOC Specific Interchange Times File | 31 |
| 5.13 | Master Station Name File Contents | 32 |
| 6. | System Limits | 36 |
| 7. | Data Feed Distribution Service | 37 |
| 7.1 | General | 37 |
| 7.2 | Feed File | 37 |
| 7.3 | Scheduling | 37 |
| 7.4 | Resumption of feed delivery after a distribution of 'Empty' feeds | 37 |
| 7.5 | Distribution Configuration..... | 37 |
| 7.6 | Daily Feed Distribution | 38 |
| 7.7 | Weekly and Monthly Feed Distribution | 38 |
| | Appendix A – The TTIS feed | 39 |

Terms and Definitions

| Term | Definition |
|----------|---|
| ATOC | Association of Train Operating Companies |
| BTD | Basic Timetable Detail |
| CATE | Computer Assisted Timetable Enquiries (heritage journey planner) |
| CIF | Common Interface File |
| CRS | Computerised Reservation System (heritage reservation system) |
| CRS Code | A 3-character code issued to every railway station in Britain |
| DTD | Data Transformation and Distribution Service |
| FLF | Fixed Links File |
| ITPS | Network Rail Integrated Train Planning System |
| MSED | Master Stations Editor (heritage locations editor) |
| MSNF | Master Station Names File |
| NLC | National Location Code |
| PO MCP | Post Office Location Code |
| RDG | Rail Delivery Group |
| RSP | Rail Settlement Plan |
| SFTP | Secure File Transfer Protocol |
| STP | Short Term Plan |
| TIPLOC | Timing Point Location - a code of 4-7 characters. If less than 7 then it will be padded by blanks |
| TOPS | Total Operations Processing System (a list of every vehicle on the railway) |
| TTIS | Timetable Information Service |
| UIC | Union Internationale des Chemins de fer (International Union of Railways) |
| UID | Unique Identifier |

1. Acknowledgements

- 1.1 The information provided in this document, regarding the Common Interface File (CIF) format, is reproduced from the 'Common Interface File - End User Specification' which is copyright Network Rail.
- 1.2 The information provided in this document regarding data content is originally sourced from Network Rail.

2. Scope

- 2.1 The Rail Delivery Group (RDG) have taken steps to ensure that all necessary actions and permissions are gained from Network Rail and all other parties as necessary to permit the reproduction of Network Rail documentation relating to the CIF, and to permit the Data Transformation and Distribution Service (DTD) to take CIF data, manipulate it (including the addition of Bus and Ferry Operator's data), and present the modified data as a Data Feed to external parties in CIF format.
- 2.2 The scope of this document is the interface specification of Timetable Information Data Feed provided by the DTD service.
- 2.3 This document describes the file structure of all the Timetable files of the Timetable Feed and provides technical details of how these files are made available to registered recipients of the data.
- 2.4 The DTD service is responsible for managing and distributing other Data Feeds and the following documents describe the interfaces:
 - RSPS5045: 'Fares and Associated Data Feed Interface Specification'
 - RSPS5047: 'National Routeing Guide Data Feed Specification'

3. Approach

- 3.1 The diagram below is an overview of the 'Feed Processing and Transformation Service', which transforms the imported feed data and generates output feed files. The output feed files are distributed to those registered Data Feed recipients with appropriate entitlements via SFTP Pull or Push.

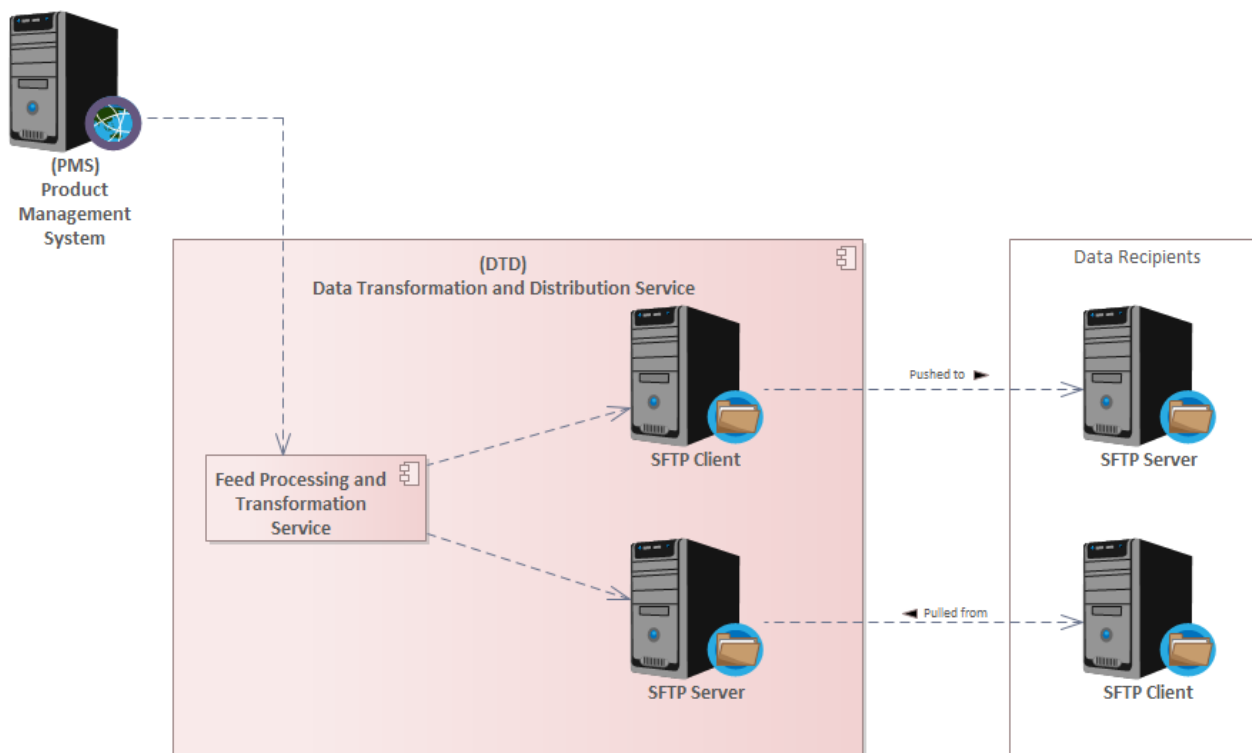


Figure 1 Feed Processing and Transformation Service overview

4. Data feeds

4.1 The Data Feeds are delivered in fixed format flat text files.

4.2 The following export file types are defined for the DTD CIF Timetable Data Feed.

| File type | Contents and notes | Generic filename ¹ |
|-----------------------------------|---|-------------------------------|
| Contents | This file lists all the filenames included in the timetable Data Feed, except for the contents file itself. | RJTTFnnnn.DAT RJTTcnnn.DAT |
| Full Basic Timetable Detail | Full CIF refresh file containing all timetable details in TTIS CIF format. | RJTTFnnnn.MCA |
| Daily Updates to Timetable Detail | CIF update file to be applied to Full Basic Timetable Detail. | RJTTCnnn.CFA |
| TTIS Reject | File contains records that have been rejected in the DTD processing before the MCA and CFA files are created. | RJTTFnnnn.REJ |
| Z-trains | Quasi-CIF format file containing details of bus and ferry transportation. Refresh Only File. The 'Z-trains' data (bus, ferry etc.) is always a full file in Quasi-CIF format and applies to the currently Live timetable data only. This file is supplied separately to avoid mixing daily updates with full files of 'Z-trains' data and to avoid mixing CIF format and Quasi-CIF format files. | RJTTFnnnn.ZTR |
| CIF Set Details | Although the header / footer dates and sequence number are updated the files data is effectively redundant and permanently fixed with UCFCATE. | RJTTFnnnn.SET |
| Fixed Links | Fixed Links file containing details of links between stations involving transfer by other than train. The file is always a full file and applies to the currently Live CIF data only. | RJTTFnnnn.FLF |
| Additional Fixed Links | Fixed Links file containing details of links between stations involving transfer by other than train; including day/date/time variations. | RJTTFnnnn.ALF |
| TOC Specific Interchange Times | Minimum interchange times at stations at which different minimum interchange times apply, depending on the TOC(s). | RJTTFnnnn.TSI |
| Master Station Names | Station details including Name, Location Codes, Interchange Suitability, Minimum Interchange Time, Map reference, Alias name etc. The file is always a full file and applies to the currently Live CIF data only. | RJTTFnnnn.MSN |
| ZIP files | Compressed files containing the full and update only files respectively. | RJTTFnnnn.ZIP RJTTcnnn.ZIP |

The format of the files used in the Timetable Data Feed is defined in the next section.

¹ Within the 'Generic Filename' nnn is a sequence number defined by DTD. (999 'rolls over' to 001).

- 4.3 RSPS5044: 'IPTIS Data Management Service Reference Data', contains additional timetable reference data.
- 4.4 In addition to the data feed detailed in this document there is also a historic feed still used by some systems – the TTIS feed. The data in the feed is essentially the same but for historic reasons there are some differences with filenames, footers, and headers. For more information see 'Appendix A – The TTIS feed'.

5. Key Technical Details

5.1 Structure

5.1.1 The Timetable Data Feed comprises several separate files containing data records. Each file is comprised of an informational header, followed by an ordered sequence of records, followed by a terminator. The records are fixed format; each record contains fields of the length described in the body of this document.

5.1.2 Every line of every file is either a comment (introduced by a leading '/' character) or a record.

5.1.3 The Contents, Fixed Links, Master Station Names and CIF Set Details files commence with the following sequence of comments.

```

/!! Start of file

/!! Content type:  type

/!! Sequence:      nnn

/!! Generated:     dd/mm/yyyy

/!! Exporter:      DTD_module version
    
```

where type matches the file extension as per the table in section 4.

5.1.4 The sequence number listed in the header will match that in the filename.

5.1.5 The Contents, Fixed Links, Master Station Names and CIF Set Details files terminate with a comment to provide some protection against inadvertent file truncation:

```

/!! End of file (x records) (dd/mm/yyyy)
    
```

x contains the number of records reported. The figure does not include comments.

5.2 Contents file

5.2.1 Description

- 5.2.1.1 This file lists all the filenames included in the timetable Data Feed set, except for the Contents file itself. Two of these files exist; one for customers receiving a full Data Feed, one for customers receiving an update only feed.

5.2.2 Example data

```

/!! Start of file
/!! Content type:  DAT
/!! Sequence:      956
/!! Generated:     09/04/2018
/!! Exporter:      RjEhrTTT
RJTTTF956.ZTR
RJTTTF956.REJ
RJTTTF956.SET
RJTTTF956.FLF
RJTTTF956.MCA
RJTTTF956.MSN
RJTTTF956.ALF
RJTTTF956.TSI
/!! End of file (8 records) (09/04/2018)

```

5.3 Basic Timetable Detail File

5.3.1 The Basic Timetable Detail (BTD) record formats are the same as the CIF record formats. Information about CIF contents and formats are reproduced here for information (see section 1, 'Acknowledgements' for source references). RDG will issue technical documentation of this sort as part of the end-user license agreement. The record layouts may change over time.

5.3.2 It should be noted that the CIF Data Feed to the DTD data factory is a subset of the data held on the Network Rail Integrated Train Planning System (ITPS). The DTD timetable Data Feed is not a replacement of the CIF mechanism provided by Network Rail, it is a timetable Data Feed supplemented with additional information (such as Bus and Ferry details). For example, DTD does not receive information about empty rolling stock, freight movements, etc. and cannot therefore pass such information forward to other users.

5.3.3 Schedule Records

5.3.3.1 The file contains a set of train schedules. A train schedule is an image of a train where all the train's details are constant for the dates the schedule applies.

5.3.3.2 Only schedules for totally valid trains are generated on the extract file. Should a valid train be edited and in consequence become invalid, the user will be left with the last valid schedule(s) for the train. When the train is again declared valid, the new set of schedules will become available for the user.

5.3.3.3 A train schedule can be uniquely identified by a combination of UID, Start-date & Overlay indicator.

5.3.4 Associations Records

5.3.4.1 The file also contains train association records. These document the link between a pair of trains. Associations are passed independently of train schedules.

5.3.4.2 CIF will document when an association occurs by holding the dates for which the association applies, not the schedules it applies to. The user will have to establish the schedules involved in the association.

5.3.4.3 Associations between 2 trains do not necessarily occur on exactly the same set of dates as far as the train schedule dates are concerned. This situation arises either: (a) when one train runs over midnight and the other does not, and the first train associates with the second after midnight: or (b) where a train terminating late one day is associated with a train which runs early the following day e.g. train A runs 29/05/17 – 21/09/17 FSX. Train B runs 30/05/17 – 22/09/17 MSX. A & B are associated with each other. The Association applies from 29/05/17 – 21/09/17 FSX.

5.3.4.4 The association dates refer to those of the Base UID. Where the dates of the associated train schedules will either be 1 day ahead or behind those of the Base UID schedules this is indicated by Association-type. In this case Association-type would be set to 'N' (see later in the document for the list of association types).

5.3.4.5 In the case of Join & Divide Associations, the Base UID will always be the 'through' train. For Previous/Next Associations, the Base UID will be the train that has a 'next' working. (Previous/Next associations are for Operating purposes only and must be ignored for passenger purposes).

5.3.4.6 An association record is identified as:

- Base-UID/Assoc-UID/Start-date/Diagram Type/
- Location (Assoc-Location/Base-loc-suff/Assoc-loc-suff)

5.3.5 TIPLOC Codes

5.3.5.1 Details of TIPLOC location codes are included in the file. No UIC Codes are included.

5.3.5.2 The presence of a TIPLOC in the file does not indicate that it is a passenger location, so journey planners should not use the TIPLOC Insert/Amend/Delete records to determine which locations are required for passenger enquiries. The data in the MSN file should be used instead.

5.3.6 Daylight Saving

5.3.6.1 The train schedule data makes no adjustment for the twice yearly clock changes.

5.3.6.2 On the last Sunday in March, any train that departs from its origin up to 00:59 Greenwich Mean Time will be timed in its GMT timings throughout. Any train that departs from its origin on or after 02:00 British Summer Time will be timed in its BST timings throughout.

5.3.6.3 On the last Sunday in October, any train that departs from its origin up to 01:59 British Summer Time will be timed in its BST timings throughout. Any train that departs from its origin on or after 01:00 Greenwich Mean Time will be timed in its GMT timings throughout.

5.3.6.4 How the BST/GMT swap-over is dealt with is up to each affected Train Operator. The TOC may just operate a train at 01:02 BST then nothing at all for an hour when the clocks go back, but may elect to run a train at both 01:02 BST and 01:02 GMT. When this happens the second train will be done as an STP insert, using a different UID - how retail systems determine which is which would be down to the recipient system.

5.3.6.5 It is the responsibility of the journey planner to interpret these correctly in the display presented to the customer.

5.4 Basic Timetable Detail File Format

5.4.1 The file is a sequential text file containing fixed length 80-character records, padded with trailing spaces as necessary. Records are terminated by carriage return line feed. The file contains different record types which can be identified by the 'record identity', the first two bytes of a record.

5.4.2 The following applies to all CIF format files namely the 'Full Basic Timetable Detail and 'Daily Updates to Timetable Detail'.

5.4.3 The sequence of records on the file is significant. The following sequence laws apply (the record identity is given in brackets ()):

- i. Header record (HD)
- ii. TIPLOC insert records (TI)
- iii. TIPLOC amend records (TA – 'update' files only)
- iv. TIPLOC delete records (TD – 'update' files only)
- v. All association records in Start-date sequence (AA)
- vi. All train schedules in Start-date/UID sequence²

A train schedule comprises a set of records, output in the following order:

- A basic schedule record (BS)
- A basic schedule extra details record (BX)
- An origin location record (LO)
- All intermediate location records (LI) in journey sequence
- Preceded by a Change in Route, if present, for the station (CR)
- Terminating location record (LT)
- vii. Trailer record (ZZ)

5.4.4 Therefore, the record:

```
BSNY5329019052419092000000001 POO2T07 124207004 EMU319 100D B P
```

would appear in the file before the record

```
BSNC4329020062420092000000001 POO2T07 124207004 EMU319 100D B P
```

5.4.5 Where a train schedule deletion or cancellation is raised, only a basic schedule record (BS) is output. Otherwise, the schedule will consist of at least record types BS, BX, LO and LT.

5.4.6 If the situation arises whereby there are no updates for a particular day, it is possible that an "empty" file will be generated. The "empty" file consists of a header (HD) and trailer (ZZ) record only.

5.4.7 Two other record types – Train Specific Notes (TN) and Location Specific Notes (LN) are identified in CIF but are not implemented. When these are implemented in CIF, this DTD Data Feed will also implement them.

5.4.8 If a train is updated, new schedules will be passed on the BTD file via CIF.

5.4.9 Only valid advertised passenger trains are passed to DTD (and hence to BTD users); this is also true of associations. Only valid associations are passed to DTD.

² BS Records are sorted in ascending order of date, so records with the start date 221030 would appear before records with the start date 230101 (i.e. it is not an ASCII sort sequence). Note that in the BS record the UID field appears before the start date field, but the start date field is the first sort key, and UID is the secondary sort key

- 5.4.10 Train schedule records and association records are created separately within the train planning system. The amendment, cancellation or deletion of a train schedule may not necessarily be reflected in the amendment, cancellation or deletion of an association record for the same period in which that train is mentioned – but should be treated by the journey planner as if that were the case for the appropriate days/dates.
- 5.4.11 Full STP facilities are available, including the ability to STP cancel an association without cancelling the trains, or to STP amend an association. Also, it is possible to have an STP association defined, where no permanent association exists. In addition, it is possible for a train to have more than one join or split at a location.
- 5.4.12 A specific location may occur on each schedule up to nine times. These are distinguished by Unique suffix values (either 'blank' or in the range 2-9 inclusive) following the TIPLOC in the 'LOCATION' field of the LO, LI OT LT records. If present, the suffix value will always appear as the eighth character, even if the TIPLOC has less than seven characters.
- 5.4.13 Journey planners must display the public times in all passenger enquiries. In most case the scheduled and public times will be identical or will be rounded up/down by ½ minute. However, there are instances where the discrepancy between the two will be several minutes. In such cases it is the public times that should be displayed and used to calculate minimum connection times for changing trains.

5.5 Basic Timetable Detail Record Layouts

5.5.1 Header Record

5.5.1.1 The Header Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|------------------------|--------|----------|--|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'HD'. |
| 2 | File Identity | 20 | 3-22 | |
| 3 | Date of Extract | 6 | 23-28 | Format ddmmyy defining the date that the BTD extract file was created. |
| 4 | Time of Extract | 4 | 29-32 | hhmm defining the time that the BTD extract file was created. |
| 5 | Current File Reference | 7 | 33-39 | Unique file reference. |
| 6 | Last-file-reference | 7 | 40-46 | Unique file reference. |
| 7 | Update Indicator | 1 | 47 | 'U'=Update. 'F'=Full extract. |
| 8 | Version | 1 | 48 | Version identifier of CIF software. |
| 9 | Extract start date | 6 | 49-54 | Same as Field 3 above. |
| 10 | Extract end date | 6 | 55-60 | |
| 11 | Spare | 20 | 61-80 | |

5.5.1.2 Note that there is a 'quirk' in the date information in the header record for full refreshes is hardcoded to a fixed date/period rather than reflecting the actual dates it relates to.

5.5.2 Basic Schedule

5.5.2.1 The Basic Schedule Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|--|--------|----------|---|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'BS'. |
| 2 | Transaction Type | 1 | 3-3 | 'N' = New. 'D' = Delete. 'R' = Revise. |
| 3 | Train UID | 6 | 4-9 | Unique train Identifier. |
| 4 | Date Runs From | 6 | 10-15 | yyymmdd |
| 5 | Date Runs To | 6 | 16-21 | yyymmdd |
| 6 | Days Run | 7 | 22-28 | |
| 7 | Bank Holiday Running | 1 | 29-29 | |
| 8 | Train Status | 1 | 30-30 | |
| 9 | Train Category | 2 | 31-32 | |
| 10 | Train Identity | 4 | 33-36 | |
| 11 | Headcode | 4 | 37-40 | |
| 12 | Course Indicator | 1 | 41-41 | Not used - always set to 1. |
| 13 | Profit Centre Code/ Train Service Code | 8 | 42-49 | |
| 14 | Business Sector | 1 | 50-50 | Now used to contain the portion suffix for RSID |
| 15 | Power Type | 3 | 51-53 | |
| 16 | Timing Load | 4 | 54-57 | |
| 17 | Speed | 3 | 58-60 | |
| 18 | Operating Chars | 6 | 61-66 | |
| 19 | Train Class | 1 | 67-67 | |
| 20 | Sleepers | 1 | 68-68 | |
| 21 | Reservations | 1 | 69-69 | Permitted values are: A – Seat Reservations Compulsory (R symbol in white box) E – Reservations for Bicycles Essential (Inverted black triangle) R – Seat Reservations Recommended (R symbol in black box) S – Seat Reservations possible from any station (white diamond symbol) |
| 22 | Connect Indicator | 1 | 70-70 | Not used - always set to blank. |
| 23 | Catering Code | 4 | 71-74 | |
| 24 | Service Branding | 4 | 75-78 | |
| 25 | Spare | 1 | 79-79 | |
| 26 | STP indicator | 1 | 80-80 | 'C' = STP cancellation of permanent schedule. 'N' = New STP schedule. 'O' = STP overlay of permanent schedule. 'P' = Permanent. Read in association with the Transaction Type in Field 2 |

5.5.3 Basic Schedule Extra Details

5.5.3.1 The Basic Schedule Extra Details Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|---------------------------|--------|----------|--|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'BX'. |
| 2 | Traction Class | 4 | 3-6 | Not used – always blank. |
| 3 | UIC Code | 5 | 7-11 | Only populated for trains travelling to/from Europe via the Channel Tunnel, otherwise blank. |
| 4 | ATOC Code | 2 | 12-13 | |
| 5 | Applicable Timetable Code | 1 | 14-14 | Always set to 'Y'. |
| 6 | Retail Service ID | 8 | 15-22 | |
| 7 | Source | 1 | 23-23 | Not used – always blank. |
| 8 | Spare | 57 | 24-80 | |

5.5.4 Origin Location

5.5.4.1 The Origin Location Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|--------------------------|--------|----------|---|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'LO'. |
| 2 | Location | 8 | 3-10 | TIPLOC + Suffix. Suffix is always the eighth character. |
| 3 | Scheduled Departure Time | 5 | 11-15 | |
| 4 | Public Departure Time | 4 | 16-19 | If there is no Public Departure time this field will default to 0000. |
| 5 | Platform | 3 | 20-22 | |
| 6 | Line | 3 | 23-25 | |
| 7 | Engineering Allowance | 2 | 26-27 | |
| 8 | Pathing Allowance | 2 | 28-29 | |
| 9 | Activity | 12 | 30-41 | Up to 6 activity codes may be present. The first 2 characters will always be TB (train begins). If there are no other activity codes, this defaults to being an advertised departure. |
| 10 | Performance Allowance | 2 | 42-43 | |
| 11 | Spare | 37 | 44-80 | |

5.5.5 Intermediate Location

5.5.5.1 The Intermediate Location Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|--------------------------|--------|----------|---|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'LI'. |
| 2 | Location | 8 | 3-10 | TIPLOC + Suffix. Suffix is always the eighth character. |
| 3 | Scheduled Arrival Time | 5 | 11-15 | |
| 4 | Scheduled Departure Time | 5 | 16-20 | |
| 5 | Scheduled Pass | 5 | 21-25 | |
| 6 | Public Arrival | 4 | 26-29 | If there is no Public Arrival time this field will default to 0000. |
| 7 | Public Departure | 4 | 30-33 | If there is no Public Departure time this field will default to 0000. |
| 8 | Platform | 3 | 34-36 | |
| 9 | Line | 3 | 37-39 | |
| 10 | Path | 3 | 40-42 | |
| 11 | Activity | 12 | 43-54 | Up to 6 activity codes may be present. |
| 12 | Engineering Allowance | 2 | 55-56 | |
| 13 | Pathing Allowance | 2 | 57-58 | |
| 14 | Performance Allowance | 2 | 59-60 | |
| 15 | Spare | 20 | 61-80 | |

5.5.6 Changes En Route

5.5.6.1 The Changes En Route Record contains the following data fields:

5.5.6.2 This will precede the LI record of the location to which it applies.

| Field | Field description | Length | Position | Notes |
|-------|---|--------|----------|--|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'CR'. |
| 2 | Location | 8 | 3-10 | TIPLOC + Suffix. Suffix is always the eighth character. |
| 3 | Train Category | 2 | 11-12 | |
| 4 | Train Identity | 4 | 13-16 | |
| 5 | Headcode | 4 | 17-20 | |
| 6 | Course Indicator | 1 | 21-21 | |
| 7 | Profit Centre Code/ Train Service Code | 8 | 22-29 | |
| 8 | Business Sector | 1 | 30-30 | |
| 9 | Power Type | 3 | 31-33 | |
| 10 | Timing Load | 4 | 34-37 | |
| 11 | Speed | 3 | 38-40 | |
| 12 | Operating Chars | 6 | 41-46 | |
| 13 | Train Class | 1 | 47-47 | |
| 14 | Sleepers | 1 | 48-48 | |
| 15 | Reservations | 1 | 49-49 | |
| 16 | Connect Indicator | 1 | 50-50 | |
| 17 | Catering Code | 4 | 51-54 | |
| 18 | Service Branding | 4 | 55-58 | |
| 19 | Traction Class | 4 | 59-62 | |
| 20 | UIC Code | 5 | 63-67 | Only populated for trains travelling to/from Europe via the Channel Tunnel, otherwise blank. |
| 21 | Retail Service ID | 8 | 68-75 | |
| 22 | Spare | 5 | 76-80 | |

5.5.7 Terminating Location

5.5.7.1 The Terminating Location Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|------------------------|--------|----------|---|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'LT'. |
| 2 | Location | 8 | 3-10 | TIPLOC +Suffix. Suffix is always the eighth character. |
| 3 | Scheduled Arrival Time | 5 | 11-15 | |
| 4 | Public Arrival Time | 4 | 16-19 | If there is no Public Arrival time this field will default to 0000. |
| 5 | Platform | 3 | 20-22 | |
| 6 | Path | 3 | 23-25 | |
| 7 | Activity | 12 | 26-37 | Up to 6 activity codes may be present. The first 2 characters will always be TF (train finishes). If there are no other activity codes, this defaults to being an advertised arrival. |
| 8 | Spare | 43 | 38-80 | |

5.5.8 Association

- 5.5.8.1 Association schedules are created separately from the trains to which they apply. It may be that they are not published on the same day as one or other of the train schedules. It is up to the recipient to marry up the train schedules and the associations as and when both are present. It may also be that one of the trains in the association is not for passenger use - in which case that train schedule will not appear in the file at all.

5.5.8.2 The Association Record contains the following data fields:

| Field | Field description | Length | Pos | Notes |
|-------|-----------------------|--------|-------|--|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'AA'. |
| 2 | Transaction Type | 1 | 3-3 | 'N' = New. 'D' = Delete. 'R' = Revise. |
| 3 | Base UID | 6 | 4-9 | One of the trains involved in the association. This will always be the through train, not the splitting/joining portion. |
| 4 | Assoc UID | 6 | 10-15 | The other train involved. |
| 5 | Assoc Start date | 6 | 16-21 | Format: yymmdd. May not be the same as the dates of the train schedules. |
| 6 | Assoc End date | 6 | 22-27 | Format: yymmdd. May not be the same as the dates of the train schedules. |
| 7 | Assoc Days | 7 | 28-34 | |
| 8 | Assoc Cat | 2 | 35-36 | The ASSOC-CAT for the base UID (first byte), followed by the ASSOC-CAT for the assoc. UID (second byte). Note: Although this field isn't specified as having blanks in the Network Rail CIF specification, if blanks are supplied they will be carried forward. (Blanks are used to override the permanent value in overlays and cancellations). 'JJ' for Joining trains and 'VV' for Dividing trains. 'NP' for Next/Previous Associations may also be displayed but as this is an Operating association it should be ignored by journey planners. |
| 9 | Assoc Date Ind | 1 | 37-37 | 'S' = Standard. 'N' = Over-next-midnight. 'P' = Over-previous-midnight. Note: Although this field isn't specified as having blanks in the Network Rail CIF specification, if blanks are supplied they will be carried forward. (Blanks are used to override the permanent value in overlays and cancellations). |
| 10 | Assoc Location | 7 | 38-44 | TIPLOC where association occurs. |
| 11 | Base Location Suffix | 1 | 45-45 | Values are space or 2. |
| 12 | Assoc Location Suffix | 1 | 46-46 | Values are space or 2. |
| 13 | Diagram Type | 1 | 47-47 | With the constant value 'T'. |
| 14 | Association Type | 1 | 48-48 | 'P' = Passenger use. 'O' = Operating use. Note: Although this field isn't specified as having blanks in the Network Rail CIF specification, if blanks are supplied they will be carried forward. (If blank then association defaults to Operating and should be ignored by journey planners). |
| 15 | Filler | 31 | 49-79 | |
| 16 | STP indicator | 1 | 80-80 | Read in conjunction with the 'Transaction Type' in Field 2. 'C' = STP cancellation of permanent schedule. 'N' = New STP schedule. 'O' = STP overlay of permanent schedule. 'P' = Permanent. |

5.5.9 TIPLOC Insert

5.5.9.1 The TIPLOC Insert Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|------------------------|--------|----------|--|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'TI'. |
| 2 | TIPLOC code | 7 | 3-9 | A TIPLOC is 4-7 characters. If less than 7 then it will be padded by blanks. |
| 3 | Capitals | 2 | 10-11 | Defines capitalisation of TIPLOC. Can be ignored for retailing/journey planners. |
| 4 | National Location Code | 6 | 12-17 | |
| 5 | NLC Check Character | 1 | 18-18 | |
| 6 | TPS Description | 26 | 19-44 | |
| 7 | STANOX | 5 | 45-49 | TOPS location code. |
| 8 | PO MCP Code | 4 | 50-53 | Post Office Location Code. (Not used but may contain historic data or three blank spaces followed by 0). |
| 9 | CRS Code | 3 | 54-56 | |
| 10 | Description | 16 | 57-72 | Description used in LENNON. |
| 11 | Spare | 8 | 73-80 | |

5.5.10 TIPLOC Amend

5.5.10.1 The TIPLOC Amend Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|------------------------|--------|----------|--|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'TA'. |
| 2 | TIPLOC code | 7 | 3-9 | A TIPLOC is 4-7 characters. If less than 7 then it will be padded by blanks. |
| 3 | Capitals | 2 | 10-11 | Defines capitalisation of TIPLOC. Can be ignored for retailing/journey planners. |
| 4 | National Location Code | 6 | 12-17 | |
| 5 | NLC Check Character | 1 | 18-18 | |
| 6 | TPS Description | 26 | 19-44 | |
| 7 | STANOX | 5 | 45-49 | TOPS location code. |
| 8 | PO MCP Code | 4 | 50-53 | Post Office Location Code. (Not used but may contain historic data or three blank spaces followed by 0). |
| 9 | CRS Code | 3 | 54-56 | |
| 10 | Description | 16 | 57-72 | Description used in LENNON. |
| 11 | New TIPLOC | 7 | 73-79 | Only present if TIPLOC change. |
| 12 | Spare | 1 | 80-80 | |

5.5.11 TIPLOC Delete

5.5.11.1 The TIPLOC Delete record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|-------------------|--------|----------|-------------------------------|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'TD'. |
| 2 | TIPLOC code | 7 | 3-9 | |
| 3 | Spare | 71 | 10-80 | |

5.5.12 Trailer Record

5.5.12.1 The Trailer Record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|-------------------|--------|----------|-------------------------------|
| 1 | Record Identity | 2 | 1-2 | With the constant value 'ZZ'. |
| 2 | Spare | 78 | 3-80 | |

5.6 Example Basic Timetable Detail data

5.6.1 The data presented below has been extracted from a CIF file and is reproduced for illustration purposes only.

/ Monday-Friday services with a Join association at Salisbury

AANL52569L527442105172112101111100JJSSLSBRY TP P

/ Train schedule for Train C53290 between Bedford and Croydon

BSNC532901705241709200000001 POO2T07 124207004 EMU319 100D B P
 BX TLYTL123400
 LOBEDFDM 0841 08411 SL TBH
 LIBEDFDS 0843 00000000
 LIFLITWCK 0850 0850H 08500850 T
 LIHRLG 0854 0854H 08540854 T
 LILEAGRVE 0859H0900 09000900 T 1
 LILUTON 0904 0905 090409041 T 1H
 LIHRPNDN 0912H0913 09120912 T 1
 LISTALBCY 0919 0920 091809181 T
 LIHDON 0930H00000000
 LIWHMPSTM 0933 00000000
 LIKNTSHTN 0935H00000000 MOL 2
 LIKNSXMCL 0941H0943 09420943A T
 CRFRNDNLT OO2T07 124612004 EMU319 100D B
 LIFRNDNLT 0945H0946H 094609463 T
 LICTMSLNK 0947H000000002
 LIBLFR 0949 0950 094909504 T
 LIMTRPLTJ 0953H00000000
 LILNDNBDE 0955 0956 095509565 5 T
 LISPAROAD 0958H00000000
 LIBRCKLAJ 1000 00000000 FL 3
 LINORWDJ 1010 000000004
 LINORWDFJ 1011 00000000 SL
 LIWNDMLBJ 1011H00000000 SL
 LTECROYDN 1013 10136 TF

5.7 TTIS Rejects File

5.7.1 Description

- 5.7.1.1 This file contains details of train schedules that were rejected during DTD validation software prior to the export of the data. Examples of the reasons for rejection are schedules being incomplete or geographically inconsistent, or the train having the operating characteristic of 'Q' ("runs as required").
- 5.7.1.2 The file has a header record of 'Start of rejected trains file' and a trailer record 'End of rejected trains file'.
- 5.7.1.3 The data records consist of a line containing the description of why the schedule was rejected, followed by several lines containing the complete train schedule from the source CIF file (Normal CIF format).
- 5.7.1.4 The TTIS Rejects file record contains the following data fields:
1. Blank line.
 2. Rejection Error Message.
 3. LO CIF record type.
 4. LI CIF record type.
 5. LT CIF record type.
- 5.7.1.5 If no schedules were rejected this file will only contain the header and trailer records.

5.7.2 Example data

- 5.7.2.1 The data presented below has been extracted from a TTIS Rejects file and is reproduced for illustration purposes only.

Start of rejected trains file

No stations found between Gobowen and Cardiff Central (158 km)

BSNC146370308300308300000010 1XX1Z32 125434000 D 385 095 N

BX WBY

LOCREWE 0745 074512 TB

LICREWESW 0748 00000000

LIBESTTSB 0756H000000000

LICHST 0806H0809 080708094 T

LICHSTRSJ 0810 00000000

LISLNYJN 0812 00000000

LIWREXHMG 0825H0827 082608271 T

LIGOBOWEN 0841 0842 08410842 T

LTCRDFCEN 1059 1059 TF

5.8 'Z-trains' File

5.8.1 The 'Z-trains' file is in the same format as for a normal CIF file, with exception of the header record which is almost empty, except that an asterisk is substituted for the last character in the current file reference. Its header format is:

1. Record Identity (2 char identifier with the constant value 'HD')
2. Reserved (36 spaces)
3. '*' (1-character asterisk)
4. Reserved (41 spaces)

End of file is marked with 'ZZ'.

5.8.2 The BX record in train schedules omits the Applicable Timetable Code and Retail Service ID fields that occur in the MCA and CFA files.

5.9 Common Interface File Set Details

5.9.1 Description

5.9.1.1 This file contains a single record containing a 7-character field, in the format Uxxxxxx, where xxxxxx is the User Identity in the CIF file header record.

5.9.1.2 File is effectively redundant, and the files data permanently fixed at UCFCATE.

5.9.1.3 Each time the file is generated the 3-digit 'Sequence' number is incremented and the 'Generated' and 'End of file' dates are updated.

5.9.2 Example data

```

/!! Start of file

/!! Content type:  CIF Set Details

/!! Sequence:      788

/!! Generated:     09/01/2018

/!! Exporter:      RjEhrTTT

UCFCATE

/!! End of file (1 records) (09/01/2018)

```

5.10 Fixed Links File

5.10.1 Description

- 5.10.1.1 The Fixed Links File (FLF) contains textual descriptions of fixed links. Fixed Links define non-timetabled links between Timetable Engine Interchange stations. They provide the Timetable Engine with a means of connecting stations with a variety of modes (see below) where it is either not practical (due to volume or non-availability of data) or logical (e.g. walk links) to supply the Timetable Engine with timetabled data for the link.
- 5.10.1.2 Note that the Additional Fixed Links File (ALF) supersedes the Fixed Links File (FLF). TIS Suppliers are encouraged to use the Additional Fixed Links File data as it provides more detailed information.
- 5.10.1.3 Fixed Link transit times are summated with the minimum interchange times at the stations at either end of the link; not used instead of those interchange times.

5.10.2 File format

- 5.10.2.1 The file is a sequential text file containing variable length records.
- 5.10.2.2 Only the 'END' command is mandatory; the remainder are optional and may be used more than once. Within commands, the word/field separator is one blank character. Fixed link commands have 4 parameters: transit mode, transit time, and two CRS codes defining the Timetable Engine Interchange stations bounding the link.
- 5.10.2.3 Records are presented in the format:

 ADDITIONAL LINK: WALK BETWEEN AHV AND NCM IN 10 MINUTES
- 5.10.2.4 All text is in upper case. All lines begin 'ADDITIONAL LINK: ' followed by the link method, which is one of 'METRO', 'WALK', 'TUBE', 'BUS', 'FERRY', 'TRANSFER'. Locations are always CRS codes separated by ' AND ', the first is preceded by 'BETWEEN'. The second is followed by 'IN' and the times are always in minutes and followed by the word 'MINUTES'. The times are free format, without leading zeros (padded with a leading blank) so two minutes is shown as '2 MINUTES', twenty minutes is shown as '20 MINUTES'. One minute is shown as '1 MINUTES'.
- 5.10.2.5 The last FLF record is a file terminator, simply 'END'.

5.10.3 Metro

- 5.10.3.1 Optional. Defines a Fixed Link of type 'Metro' between the CRS codes, with transit time nnn. ('Metro' is any tram, subway or light rail system other than the London Underground).

5.10.4 Walk

- 5.10.4.1 Optional. Defines a Fixed Link of type 'Walk' between the CRS codes, with transit time nnn.

5.10.5 Tube

- 5.10.5.1 Optional. Defines a Fixed Link of type 'Tube' between the CRS codes, with transit time nnn. ('Tube' is any London Underground link on which tickets with the Cross-London marker are valid).

5.10.6 Bus

- 5.10.6.1 Optional. Defines a Fixed Link of type 'Bus' between the CRS codes, with transit time nnn.

5.10.7 Ferry

5.10.7.1 Optional. Defines a Fixed Link of type 'Ferry' between the CRS codes, with transit time nnn.

5.10.8 Transfer

5.10.8.1 Optional. Defines a Fixed Link of type 'Transfer' between the CRS codes, with transit time nnn. The 'Transfer' mode is normally used where it is inappropriate to dictate whether the transit should be made by bus, walk, taxi etc. ('Transfer' is also used on those occasions when tickets without the Cross-London marker are accepted on the London Underground e.g., for engineering work).

5.10.9 Example data

5.10.9.1 The data presented below has been extracted from an FLF and is reproduced for illustration purposes only.

```

ADDITIONAL LINK: WALK BETWEEN AFK AND ASI IN    5 MINUTES
ADDITIONAL LINK: WALK BETWEEN AHS AND ABF IN    6 MINUTES
ADDITIONAL LINK: WALK BETWEEN AHV AND NCM IN   11 MINUTES
ADDITIONAL LINK: METRO BETWEEN ALT AND AUL IN   66 MINUTES
ADDITIONAL LINK: METRO BETWEEN ALT AND AWL IN   64 MINUTES
ADDITIONAL LINK: METRO BETWEEN ALT AND BGK IN   48 MINUTES
ADDITIONAL LINK: METRO BETWEEN ALT AND BKV IN   53 MINUTES

END
    
```

5.11 Additional Fixed Links File

5.11.1 Description

- 5.11.1.1 The Additional Fixed Links File (ALF) describes details of links between two stations, ferry terminals or bus stops, and the method and time of travel between. TIS Suppliers are encouraged to use this feed in preference to the Fixed Links File (FLF).
- 5.11.1.2 Each pair of stations, ferry terminals or bus stops may be joined by one or more links in this file. Where more than one link joins a pair of stations on a given day/time, then the choice of which link should be used in a journey is determined by the Priority Field.
- 5.11.1.3 Fixed Link transit times are summated with the minimum interchange times at the stations at either end of the link; not used instead of those interchange times.

5.11.2 Record layout

| Name | Length | Description |
|--------------|--------------|--|
| Link | 2 | "M=" |
| Mode | 3, 4, 5 or 8 | BUS, TUBE, WALK, FERRY, METRO, TRAM or TRANSFER |
| Comma | 1 | " , " |
| O= | 2 | "O=" |
| Origin | 3 | 3-Alpha CRS code for location at beginning of link |
| Comma | 1 | " , " |
| D= | 2 | "D=" |
| Destination | 3 | 3-Alpha CRS code for location at end of link |
| Comma | 1 | " , " |
| T= | 2 | "T=" |
| Time | 1 or 2 | Minutes (between 1 and 99) |
| Comma | 1 | " , " |
| S= | 2 | "S=" |
| Start Time | 4 | Start Time in hhmm format |
| Comma | 1 | " , " |
| E= | 2 | "E=" |
| End Time | 4 | End Time in hhmm format |
| Comma | 1 | " , " |
| P= | 2 | "P=" |
| Priority | 1 | 1 – 7 with 1 being lowest priority |
| Comma | 1 | Optional " , " |
| F= | 2 | Optional "F=" |
| Start Date | 10 | Optional start date dd/mm/yyyy format |
| Comma | 1 | Optional " , " |
| U= | 2 | Optional "U=" |
| End Date | 10 | Optional end date dd/mm/yyyy format |
| Comma | 1 | Optional " , " |
| R= | 2 | Optional "R=" |
| Days of week | 7 | Optional NNNNNNN where N is set to 1 for active days, 0 for inactive days, for days Monday to Sunday |

5.11.3 Example data

M=TUBE, O=EUS, D=LST, T=13, S=0530, E=2359, P=4, R=1111110

M=METRO, O=MAN, D=MCV, T=8, S=0001, E=2359, P=5, F=07/01/2017, U=28/02/2017

5.12 TOC Specific Interchange Times File

5.12.1 Description

- 5.12.1.1 This data overrides the minimum interchange time at a station for a journey when changing from one TOC to another.
- 5.12.1.2 TOC specific interchange times are not bi-directional between different TOCs. For example, SE > SN does not automatically equate to SN > SE. The Gatwick Airport examples below illustrate this.
- 5.12.1.3 The file format does not allow for any day/date/time parameters for the Minimum Change Time, nor parameters for interchange between different parts of a station; all records should be treated as applying 24 hours a day, 365 days a year.

5.12.2 Record layout

| Name | Length | Description |
|--------------------------|--------|--|
| Station code | 3 | 3-Alpha CRS Code |
| Comma | 1 | " " |
| Arriving train TOC | 2 | TOC code |
| Comma | 1 | " " |
| Departing train TOC | 2 | TOC code |
| Comma | 1 | " " |
| Minimum Interchange Time | 1 or 2 | Minimum Interchange time in minutes 1 – 99 |
| Comma | 1 | Optional " " |
| Comments | 0-100 | Optional comments |

5.12.3 Example data

GLD,GW,GW,4,(Guildford)

GTW,SE,SE,5,(Gatwick Airport)

GTW,SE,SN,5,

GTW,SN,SE,5,

5.13.4 Physical station definitions

5.13.4.1 The Physical station 'A' record contains the following data fields.

5.13.4.2 Please note that some are subsidiary timing points used for timetable planning, e.g. a junction used as a subsidiary timing point. If a location has a TIPLOC used for timetable planning purposes, it will be in the .msn file distributed every night.

| Field | Field description | Length | Position | Notes |
|-------|---|--------|----------|--|
| 1 | Record Type | 1 | 1-1 | Constant value 'A'. |
| 2 | Reserved | 4 | 2-5 | |
| 3 | Station Name | 26 | 6-31 | |
| 4 | Reserved | 4 | 32-35 | |
| 5 | CATE Interchange status | 1 | 36-36 | Always populated with '0', '1', '2', '3' or '9'. |
| 6 | TIPLOC Code | 7 | 37-43 | |
| 7 | Minor CRS Code | 3 | 44-46 | Retained for legacy reason only. Journey planners should always translate this to the CRS Code in field 9. |
| 8 | Reserved | 3 | 47-49 | |
| 9 | CRS Code | 3 | 50-52 | |
| 10 | Ordnance Survey Grid Ref East | 5 | 53-57 | Values are in 0.1 km units. Format is '1nnnn' where nnnn is the distance in 0.1 km units. |
| 11 | Blank/Estimate | 1 | 58-58 | Value is blank or 'E' if Grid Reference is an estimate. |
| 12 | Ordnance Survey Grid Ref North | 5 | 59-63 | Values are in 0.1 km units. Format is '6nnnn' where nnnn is the distance in 0.1 km units. |
| 13 | Minimum Change Time | 2 | 64-65 | A one or two-digit number, in minutes, in the range 0-99. This is regardless of whether or not Field 5: 'CATE Interchange status' shows the station as an interchange. |
| 14 | Reserved | 1 | 66-66 | |
| 15 | Footnote/Closed/Staff/Not-advertised code | 1 | 67-67 | Redundant and not supported in PMS. Will always be blank. |
| 16 | Reserved | 11 | 68-78 | |
| 17 | Sub-sector code | 3 | 79-81 | Redundant and not supported in PMS. Will always be blank. |

5.13.5 Alias definitions

5.13.5.1 The **Alias** 'L' record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|-------------------|--------|----------|---------------------|
| 1 | Record Type | 1 | 1-1 | Constant value 'L'. |
| 2 | Reserved | 4 | 2-5 | |
| 3 | Station Name | 26 | 6-31 | |
| 4 | Reserved | 5 | 32-36 | |
| 5 | Station Alias | 26 | 37-62 | |
| 6 | Reserved | 20 | 63-82 | |

5.13.6 File trailer record

5.13.6.1 The **File Trailer** 'Z' record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|-------------------|--------|----------|---------------------|
| 1 | Record Type | 1 | 1-1 | Constant value 'Z'. |
| 2 | Reserved | 4 | 2-5 | |
| 3 | 'ZZZZZZZZZZ' | 10 | 6-15 | |
| 4 | Reserved | 15 | 16-30 | |
| 5 | 'END OF MSNF' | 11 | 31-41 | |
| 6 | Reserved | 40 | 42-81 | |

5.13.7 'Last written by' record

5.13.7.1 The **'Last Written By'** record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|--|----------------------------|-------------------------------------|---------------------|
| 1 | Record Type | 1 | 1-1 | Constant value 'Z'. |
| 2 | Reserved | 4 | 2-5 | |
| 3 | 'ZZZZZZZZZZZZZZZZ' | 15 | 6-20 | |
| 4 | Reserved | 10 | 21-30 | |
| 5 | 'LAST WRITTEN BY MSED. CRS AMENDMENTS ONLY' or 'LAST WRITTEN BY MSED. NON-CRS AMENDMENTS ONLY' or 'LAST WRITTEN BY MSED. PERMIT RUN' | 41 or 45 or 32 | 31-71 or 31-75 or 31-61 | |
| 6 | Reserved | 10 or 6 or 31 | 72-81 or 76-81 or 51-81 | |

5.13.8 Unique string identifier record

5.13.8.1 The **'Unique Identifier String'** record contains redundant legacy data of text '0001' followed by padding spaces.

5.13.9 File history record

5.13.9.1 The 'File History' record contains redundant legacy data with the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|-----------------------------|--------|----------|-------|
| 1 | 'MSED' | 4 | 1-4 | |
| 2 | Reserved | 1 | 5-5 | |
| 3 | MSED program version number | 4 | 6-9 | |
| 4 | Reserved | 1 | 10-10 | |
| 5 | Date of MSED program run | 8 | 11-18 | |
| 6 | Reserved | 1 | 19-19 | |
| 7 | Time of MSED program run | 8 | 20-27 | |

5.13.10 CRS usage records

5.13.10.1 The 'CRS Usage' record contains redundant legacy data with 440 records, each holding 40 two-byte values of:

- 1 CRS does not exist
- 0 CRS exists but no trains use it currently
- 1 CRS exists and one or more trains use it currently

5.13.11 End of file record

5.13.11.1 The 'End of File' record contains the following data fields:

| Field | Field description | Length | Position | Notes |
|-------|-------------------|--------|----------|-------|
| 1 | 'End of File' | 11 | 1-11 | |
| 2 | Reserved | 69 | 12-80 | |

5.13.12 Example data

The data presented below has been extracted from an MSNF and is reproduced for illustration purposes only.

```

/!! Start of file
/!! Content type: msnf
/!! Sequence: 788
/!! Generated: 09/01/2018
/!! Exporter: RjEhrTTT
A FILE-SPEC=05 1.00 09/01/18 18.10.32 788
A ABBEY WOOD 0ABWD ABW ABW15473 61790 4
A ABER 0ABER ABE ABE13148 61870 5
L ABERDOVEY ABERDYFI
L ABERGAVENNY Y-FENNI
Z ZZZZZZZZZZ END OF MSNF
Z ZZZZZZZZZZZZ LAST WRITTEN BY MSED. PERMIT RUN
0001
MSED 1.00 11/01/01 11.12.03
-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1 0-1-1-1 0-1-1-1-1-1-1-1 0-1 0 0 0-1-1 0-1-1-1 0-1-1
-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1
End of File
/!! End of file (3889 records) (09/01/2018)

```

6. System Limits

6.1 Various limits are set on the data which can be extracted to CIF and hence forwarded to DTD. The limits detailed below apply to the data before it reaches the DTD and are reproduced here for information purposes.

- The maximum number of events on a schedule is 150.
- The maximum number of schedules that can be created on CIF for a UID is 200 permanent and 200 STP. This could theoretically lead to more than 400 schedules in total for an STP user due to the interaction of permanent and STP dates.
- The number of associations is limited to 200 permanent and 200 STP associations for a pair of trains with the same diagram type/location.
- The maximum number of changes-en-route for a schedule is 50.
- Within a permanent schedule, STP data must not cause more than 64 different schedules for an STP user. STP trains which have associations, must not have more than 20 sets of dates.
- If any of the system limits are exceeded, the train will be rejected by CIF and a report generated for the System Controller.
- In addition, certain other error conditions can be detected on trains valid on data fed to CIF. These will result in error messages to the System Controller and, in some cases, the train being rejected by CIF.

7. Data Feed Distribution Service

7.1 General

- 7.1.1 Timetable Data Feeds are distributed to registered data recipients by the Data Transformation and Distribution Service (DTD). The DTD is a service owned by RDG.
- 7.1.2 The DTD provides the following delivery methods for Registered Data Feed Users to receive their feeds:
- SFTP Pull over the Internet from a publicly addressable and accessible SFTP server with the domain dtd.atocrsp.org.
 - SFTP Push over the Internet from the DTD's SFTP Client to the Data Recipient's SFTP Server.

7.2 Feed File

- 7.2.1 The Timetable feed is provided as a compressed zip file in version 2.0 of the zip file format and is readable using common zip applications such as WINZIP and UNZIP.
- 7.2.2 The Timetable Data Feed file (RJTTcnnn.DAT) is a manifest file for the feed and the Data Recipient should ensure that all files in the manifest file are present in the zip. The order of the files in the manifest file and in the zip file has no meaning and it is the Data Recipients' responsibility to process the files according to their requirements.

7.3 Scheduling

- 7.3.1 In normal operation of DTD, daily timetable and fares feed will be distributed at around 10.30pm to 1am. Data recipients should schedule checks and processing of the data accordingly. Please note however that the DTD Service does not guarantee to keep within this schedule, as it may not receive its inwards data from other providers until a later time.
- 7.3.2 The latest time that DTD will distribute feeds is 4pm. This will only happen where a failure has occurred in DTD processing or in upstream systems that provide inwards data to DTD. Where DTD cannot deliver feeds by 4pm, an 'Empty' feed for that day will be provided. This empty feed comprises the Full Refresh files (from the most recent feed) and empty Changes Only Files.

7.4 Resumption of feed delivery after a distribution of 'Empty' feeds

- 7.4.1 In circumstances where one or more 'Empty' feeds have been distributed, DTD may need to provide more than one feed in a 24-hour period. This will not be done without contacting Data Recipients to arrange the scheduling of feeds in accordance with their systems requirements. Data Recipients that are unable to process more than one feed in a 24-hour period would resume with a Full Refresh Feed and the sequence number of this Full Refresh will not necessarily be contiguous from the last feed sequence.

7.5 Distribution Configuration

- 7.5.1 Data Recipients can manage their SFTP Server configuration details using the DTD Web Portal at <https://dtdportal.atocrsp.org/>.
- 7.5.2 Data Recipients that require a resilient service can set up two SFTP servers and the DTD will distribute Fares Data to both servers.

7.5.3 The DTD SFTP service is a resilient service. If the infrastructure on which the service fails, the DTD will automatically start up another SFTP server instance on an alternative server at the same domain and IP address.

7.5.4 Data Recipients should use the web portal at <https://dtdportal.atocrsp.org/> for the IP address of the DTD SFTP Server or Client if firewall configuration is required.

7.6 Daily Feed Distribution

7.6.1 New Daily Recipients that begin the service will be provided with a full refresh of timetable data.

7.7 Weekly and Monthly Feed Distribution

7.7.1 Data Recipients that choose to receive weekly timetable feeds will receive a full refresh of timetable data each Wednesday of each week.

7.7.2 Data Recipients that choose to receive monthly timetable feeds will receive a full refresh of timetable data on the first Wednesday of each period.

Appendix A – The TTIS feed

The TTIS feed is a historic feed still used by some older systems. The feed is not available to new systems.

The data in the feed is essentially the same but for historic reasons there are some differences.

Unlike the RJTTF files, there are no header or footer records in the TTIS feed files.

Filename differences are detailed in the table below.

| File type | RJTTF filename | TTIS filename |
|-----------------------------------|-------------------------------|--|
| Contents | RJTTFnnnn.DAT RJTTcnnn.DAT | ttisfnnn.dat |
| Full Basic Timetable Detail | RJTTFnnnn.MCA | ttisfnnn.mca |
| Daily Updates to Timetable Detail | RJTTcnnn.CFA | There is no CFA file in the TTIS feed. |
| TTIS Reject | RJTTFnnnn.REJ | There is no REJ file in the TTIS feed. |
| Z-trains | RJTTFnnnn.ZTR | ttisfnnn.ztr |
| CIF Set Details | RJTTFnnnn.SET | ttisfnnn.set |
| Fixed Links | RJTTFnnnn.FLF | ttisfnnn.flf |
| Additional Fixed Links | RJTTFnnnn.ALF | ttisfnnn.alf |
| TOC Specific Interchange Times | RJTTFnnnn.TSI | ttisfnnn.tsi |
| Master Station Names | RJTTFnnnn.MSN | ttisfnnn.msn |
| ZIP files | RJTTFnnnn.ZIP RJTTcnnn.ZIP | ttisfnnn.zip |

For 'Contents and notes' about each File type, see section 4: 'Data feeds'.

End.